


Blaser

Blaser Jagdwaffen GmbH
Ziegelstadel
88316 Isny
Germany

Tel. +49 7562 7020
www. Blaser.de
info@blaser.de

Maintenance schedule Blaser Tactical 2

Maintenance schedule Blaser Tactical 2

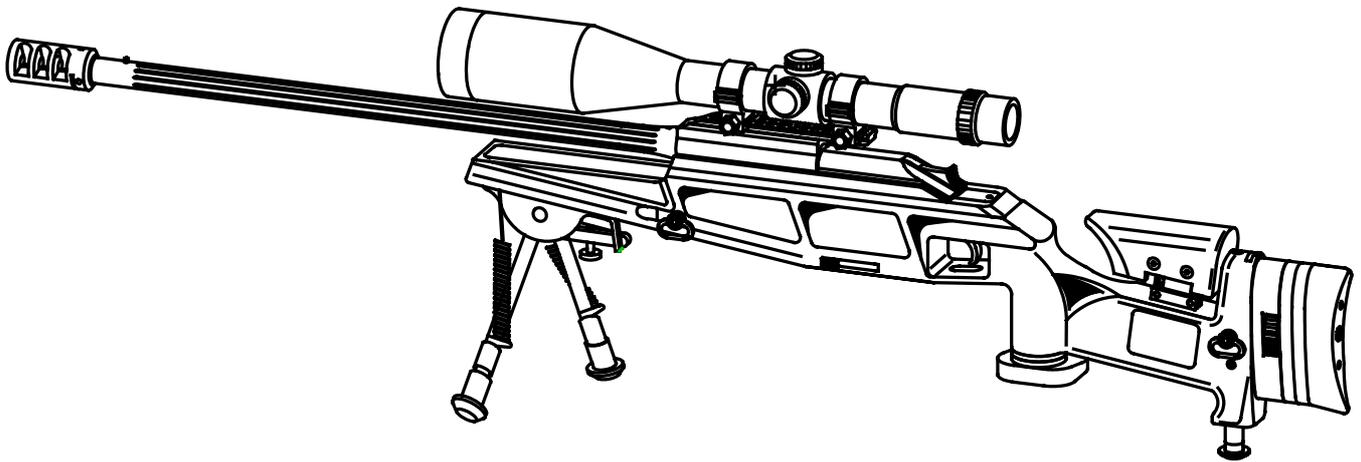

Blaser
**Jagdwaffen
GmbH**

09/2007

Maintenance schedule Blaser Tactical 2

Periodical maintenance after 5000 rounds or 1 year:

It consists of:

- checking the trigger stud height, spread size and headspace with the corresponding testing aids (see figure below and armourers manual).
If these parts show excessive wear they have to be replaced

Parts to be changed after 5000 rounds:

extractor , extractor spring , ejector

All necessary parts for that periodical maintenance are available in parts kit L68760

Periodical maintenance after 10000 rounds:

It consists of:


- checking the trigger stud height, spread size and headspace with the corresponding testing aids (see figure below and armourers manual).
If these parts show excessive wear they have to be replaced.

Parts to be changed after 10000 rounds:

extractor , extractor spring , ejector , firing pin

Maintenance schedule Blaser Tactical 2

Testing aids

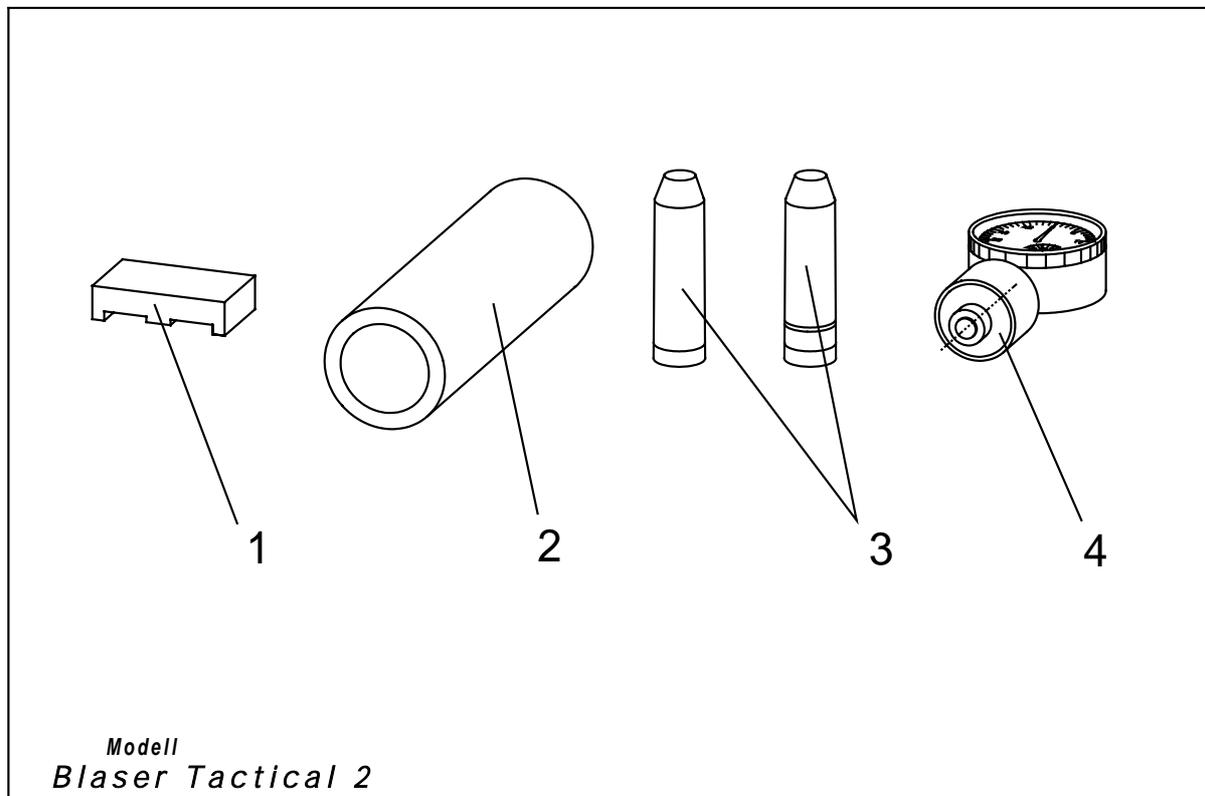

Number	Testing aid	Item number
1	Testing aid for trigger stud height	M0002540
2	Test ring for spread size	M0002520
	Test ring for spread size cal.338 Lapua Mag	M0002525
3	Set of chamber gauges .308 Win	198400
	Set of chamber gauges .338 Lapua	198402
4	Testing device for firing pin protrusion	M5021900

Maintenance schedule Blaser Tactical 2

Parts Kit L68760

Quantity	Part Name	Part#
2	extractor	959141
2	extractor spring	955181
2	ejector	955182
1	cocking slide	955160
1	threaded pin M2x8	N301139
2	buttstock spacer	L35720
1	magazine holder right	L55686
1	magazine holder left	L55685
2	stud bolt	959169
2	pressure spring	855423
2	cylinder screw	859418
2	cylinder screw M5x30	N115434
2	cylinder screw M5x50	N117001
2	cylinder screw M5x25	N114722
2	cylinder screw M5x16	N113516
2	cylinder screw M6x30	N115815
2	cylinder screw M6x35	N115001
2	countersunk screw M5x14	N112769
2	countersunk screw M5x30	N115030
1	adjustment screw	965787

Maintenance schedule Blaser Tactical 2

Barrel cleaning instructions

After each shooting:

- clean the barrel with a brass brush
- wipe the barrel with a dry cotton wig

After 100 rounds:

- clean barrel with a brass brush
- wipe the barrel with a dry cotton wig
- put some barrel cleaning solvent (Hoppe´s #9 or Shooters Choice) on a patch and apply it onto the barrel surface.
- allow the solvent to work (see manufacturers instructions)
- clean barrel with brass brush
- wipe the barrel with patch . Change the patch until no more discoloration appears